


# Proxmox PVE statische IP

Proxmox > Node > System > DNS > Edit

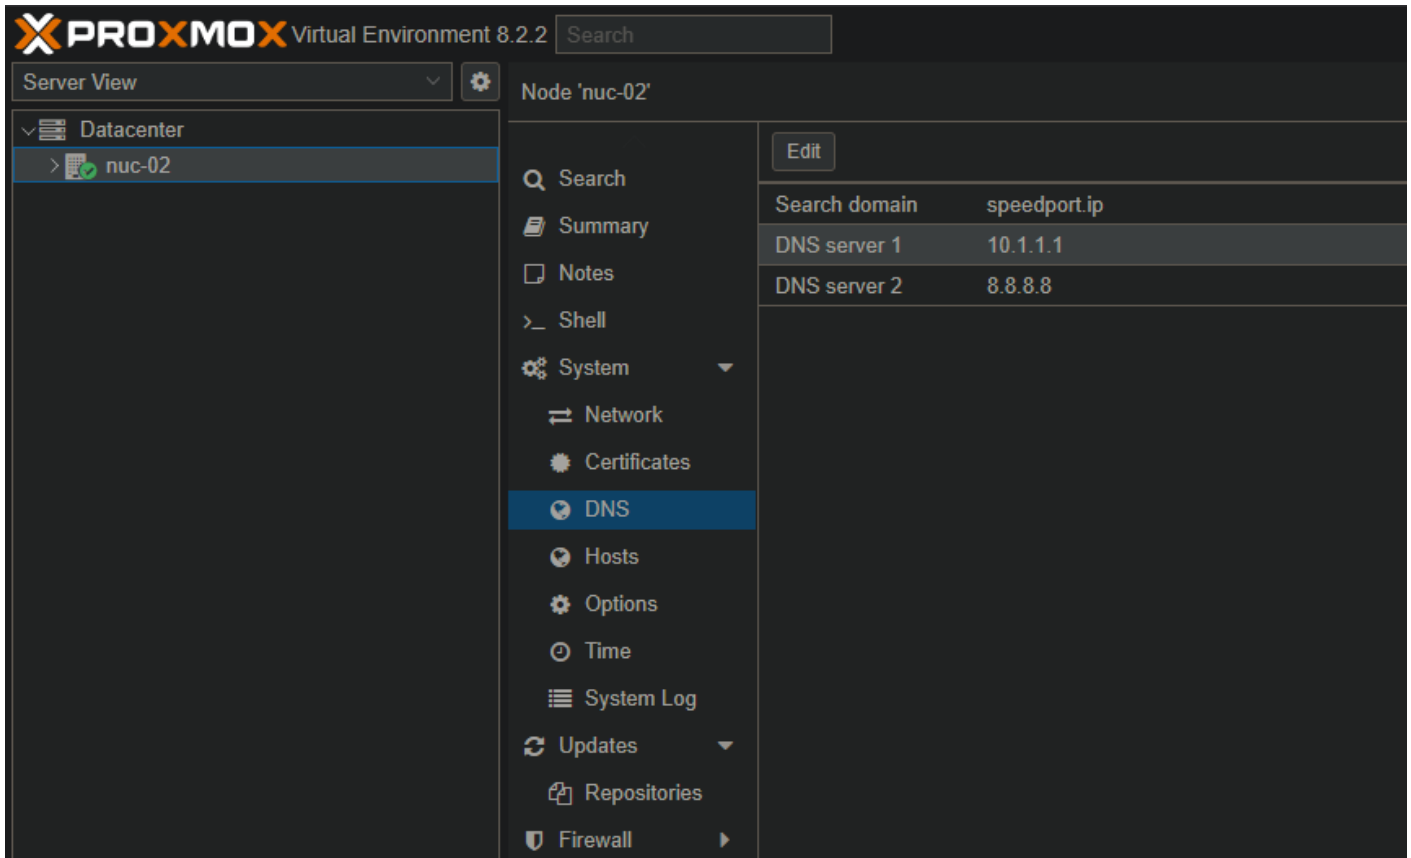

The screenshot shows the Proxmox VE 8.2.2 interface. The top bar displays the Proxmox logo and version. The left sidebar shows the navigation menu with 'Datacenter' expanded and 'nuc-02' selected. The main content area shows the 'Node 'nuc-02'' configuration page. The 'DNS' option is selected in the left sidebar. The right panel shows the 'Edit' button and a table with the following configuration:

Search domain	speedport.ip
DNS server 1	10.1.1.1
DNS server 2	8.8.8.8

damit wird immer die /etc/resolv.conf überschrieben:

```
GNU nano 7.2 /etc/resolv.conf
search speedport.ip
nameserver 10.1.1.1
nameserver 8.8.8.8
```

danach

nano /etc/network/interfaces

```
auto lo
iface lo inet loopback

iface eno1 inet manual

auto vmbr0
iface vmbr0 inet static
    address 10.1.1.69/24
    gateway 10.1.1.1
    dns-nameservers 10.1.1.1 8.8.8.8
    bridge-ports eno1
    bridge-stp off
    bridge-fd 0

iface wlp0s20f3 inet manual

source /etc/network/interfaces.d/*
```

systemctl restart networking

---

Revision #5

Created 2026-01-12 21:16:54 UTC

Updated 2026-01-25 22:01:54 UTC